

Bluetooth 5.0, TWS, 1200mAh, 3mm, 4-2, 20-80, 2*3, IPX4, TWS, 7.0*18.20

Material: ABS

5.0 : Bluetooth

10 : Earbuds

1200 : Capacity

3 : Thickness

4-2 : Buttons

20-80 : Frequency

2 * 3 : Dimensions

IPX4 : Waterproof


TWS : True Wireless Stereo

7.0 * 18.20 : Dimensions



Outdoors Waterproof LED Light Speaker

NSP-0227 L

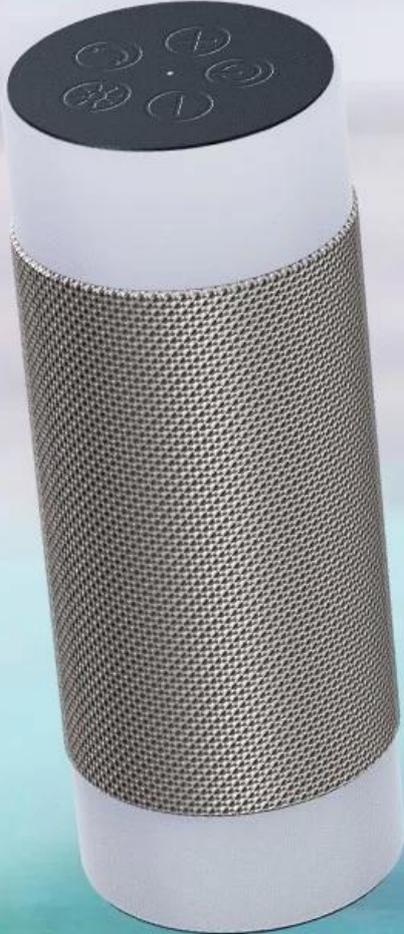

Product Highlights

Material: ABS+ Fabric

Function: Bluetooth, TWS, AUX, Multi-colors Light,

The stake in the ground

Bluetooth: 5.0

Bluetooth Distance: 10M

Battery: 1200mah

Charging time: 3 hours

Play time: 2-4 hours

Frequency Response: 80HZ-20KHZ

SPEAKER: 3W*2=6W

Waterproof: IPX4

Removable Stakes*2 =38CM

Total Height: 55.00CM including both of stakes and speaker

Product Size: 18.20 * 7.0CM

IPX4 Waterproof





Accept or Reject Incoming Calls.
Pause and Play Music

Press to Cycle through 5 Preset LED Modes.
Double Click to Turn Off LED Mode.

Press Once to go to Previous Track.
Press and Hold to Lower Volume

Press Once to Skip to Next Track.
Press and Hold to Raise Volume

Press and Hold To Power On and Off



TWS Connection
Multi-color Lighting

Enjoy in Audio Technology









:.....

..... -

Jaskey Limited 12
.....
.....

..... -

..... Sedex 4P BSCI ISO9001
.....

..... -

.....

0000 00 0000000 000000000 0000000 0000000 00 -

000000000 00000000 000000 SAWOLOL 000 0000000 000000000 000000 000000 00000 0000 00000000
.00000000 0000000

000000000 000000 000000 00 00 -

0000 00 000000 T / T 0000000 000000 (000000 0000 0000000000 0000000 000000 0000 0030 000000) 00000000
00 LC 000000 000000 00 0000 00 0 000000 000000 00000 00000 000000000 0 000000 00000 00000 000000 00
0000 PayPal 00 Western union 00 Alipay .0000000

0000 00 000000 00000000 00000 00000000 00 00 -

00000000000000000000 00000 00000 00000 00000 00000 HKTDC 000000 000000000 00000000 0000000 00 00 00
CES 00000000 0000 00000 00000 00000000 0000 00000000 00000 00000000 00000 0 0000 0000 0000
00000000 00 00000000000000 info@jaskeyworld.com 0 !0000000

00000000 00000000 00 TWS : 00000000 00000000 00

00000000 0000000 00000 00000 00 000000 00 - **twS OEM / ODM** 00000000 00000000 00

000000000 0000000 00000000 00 00000 00000 000000 OEM / ODM 0000000 0000000000 0000000 00000 00
00000000 00000 00000000 00000 000000 00 000000 000000 0000000 3 000000 0000000 00000 00000000 0000000
.0000000000 0000000000 00000000 0000000

00000000 0000000 00000 00 00000000 000000000 00 00 - **twS** 00000000 00000000 00

000000000 00000000000 0000 00000 00000000 twS 00000000000000000000 0000000000 00000000 00000000 00 0000 0000000
CE 0 ROSH 0 FCC 0 BQB .0000

000000000 0000000 00000 00 00 -

.0000000000 0000000000 0000000 7-3 :000000000 0000000

.0000000000 0000000000 000000000 0000 00000000000 0000 0000000 35-25 :0000000000 0000000 0000

